



GENERADORES DE VACÍO MULTIETAPA PVP 40 M, 70 M y 100 M

Caudal de aire (NI/s) según el grado de vacío (-Kpa)

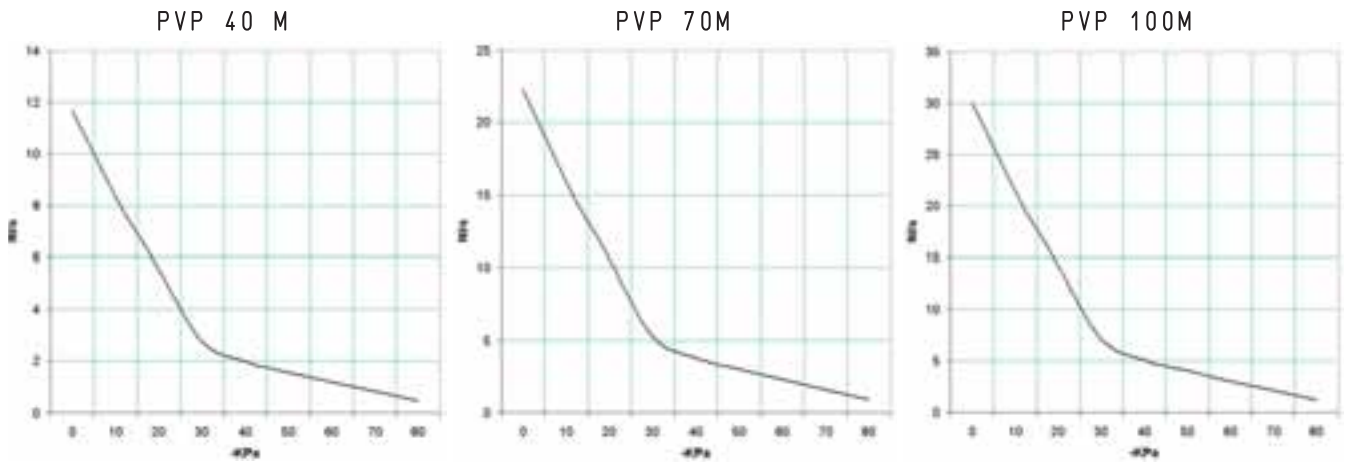

Generador art.	Pres. alim. bar	Consumo de aire NI/s	Caudal de aire (NI/s) según el grado de vacío (-KPa)										Vacío máx -KPa
			0	10	20	30	40	50	60	70	80	90	
PVP 40 M	6.0	3.2	11.66	8.32	5.55	2.77	1.98	1.58	1.19	0.83	0.47	90	
PVP 70 M	6.0	6.6	22.22	15.87	10.58	5.29	3.77	3.02	2.27	1.58	0.90	90	
PVP 100 M	6.0	9.8	30.00	21.42	14.28	7.14	5.10	4.08	3.06	2.14	1.22	90	

Tiempo de evacuación (ms/l=s/m³) según el grado de vacío (-Kpa)

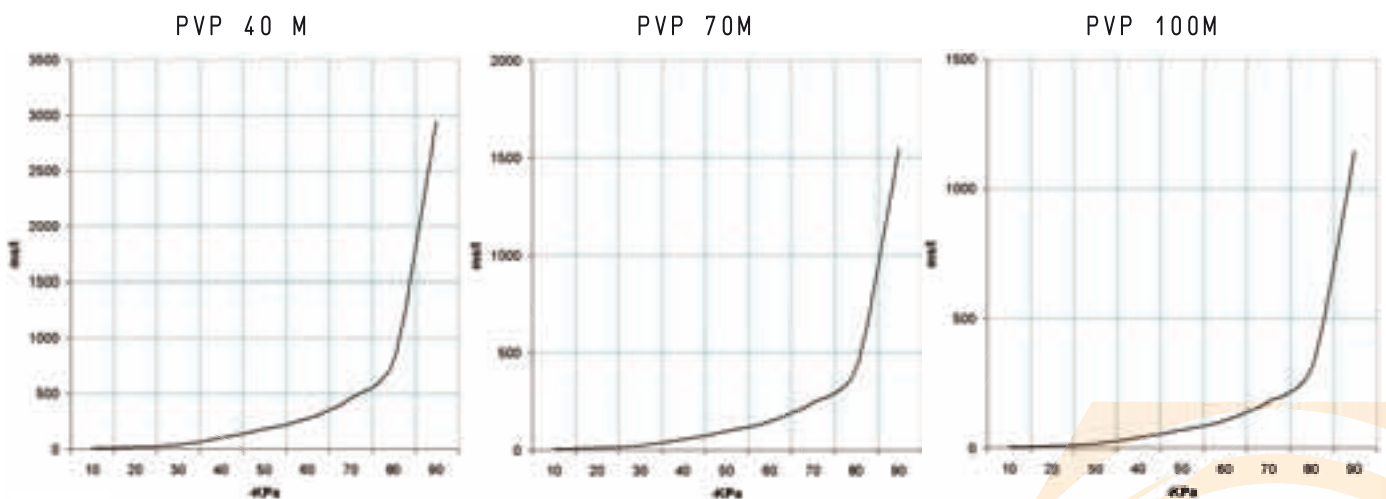

Generador art.	Pres. alim. bar	Consumo de aire NI/s	Tiempo de evacuación (ms/l = s/m ³) según el grado de vacío (-KPa)										Vacío máx -KPa
			10	20	30	40	50	60	70	80	90		
PVP 40 M	6.0	3.2	7.7	19.2	42.3	101.6	182.0	278.4	462.3	799.8	2943	90	
PVP 70 M	6.0	6.6	4.0	10.1	22.2	53.3	95.5	146.1	242.6	419.7	1544	90	
PVP 100 M	6.0	9.8	3.0	7.4	16.4	39.5	70.7	108.2	179.6	310.8	1144	90	