
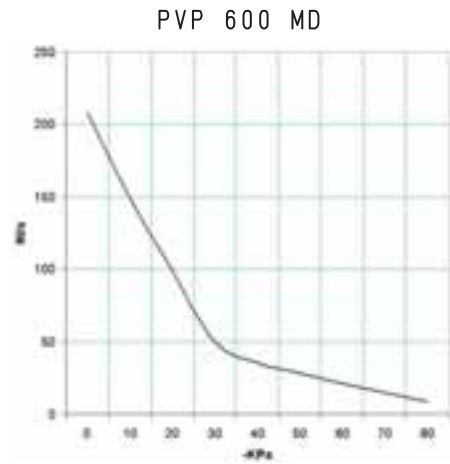




GENERADORES DE VACÍO MULTIETAPA, MODULARES, PVP 450 MD y 600 MD

Caudal de aire (NI/s) según el grado de vacío (-Kpa)

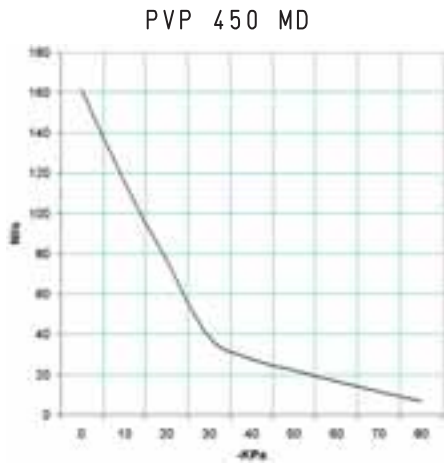

| Generador art. | Pres. alim. bar | Consumo de aire NI/s | Caudal de aire (NI/s) según el grado de vacío (-KPa) | | | | | | | | | | Vacío máx -KPa |
|-------------------|-----------------|----------------------|--|--------|-------|-------|-------|-------|-------|-------|------|----|----------------|
| | | | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | | |
| PVP 450 MD | 6.0 | 47.8 | 161.11 | 115.07 | 76.71 | 38.35 | 27.39 | 21.91 | 16.48 | 11.52 | 6.58 | 90 | |
| PVP 600 MD | 6.0 | 63.2 | 208.33 | 148.80 | 99.20 | 49.60 | 35.43 | 28.34 | 21.31 | 14.90 | 8.51 | 90 | |

Tiempo de evacuación (ms/l=s/m³) según el grado de vacío (-Kpa)

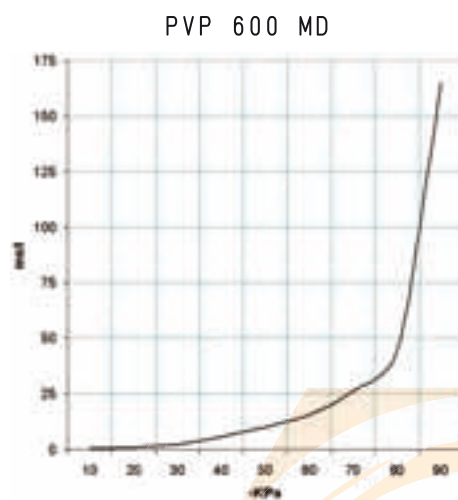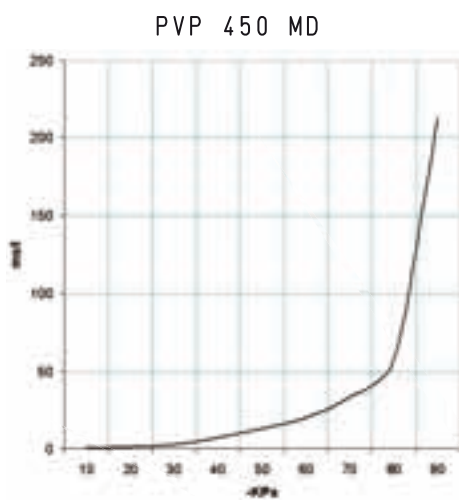

| Generador art. | Pres. alim. bar | Consumo de aire NI/s | Tiempo de evacuación (ms/l = s/m ³) según el grado de vacío (-KPa) | | | | | | | | | Vacío máx -KPa |
|-------------------|-----------------|----------------------|--|-----|-----|-----|------|------|------|------|-----|----------------|
| | | | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | |
| PVP 450 MD | 6.0 | 47.8 | 0.5 | 1.4 | 3.0 | 7.4 | 13.2 | 20.1 | 33.5 | 57.9 | 213 | 90 |
| PVP 600 MD | 6.0 | 63.2 | 0.4 | 1.0 | 2.4 | 5.7 | 10.2 | 15.6 | 25.9 | 44.8 | 165 | 90 |